

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 February 2003 (20.02.2003)

PCT

(10) International Publication Number  
**WO 03/013734 A1**

(51) International Patent Classification<sup>7</sup>: **B03C 3/45**

(21) International Application Number: **PCT/SE02/01439**

(22) International Filing Date: **8 August 2002 (08.08.2002)**

(25) Filing Language: **Swedish**

(26) Publication Language: **English**

(30) Priority Data:  
0102695-4 10 August 2001 (10.08.2001) **SE**  
0103684-7 5 November 2001 (05.11.2001) **SE**

(71) Applicant and

(72) Inventor: **LORETH, Andrzej [SE/SE]**; Fiskare Gustavs  
väg 34, S-S-184 70 Åkersberga (SE).


(74) Agent: **ERIKSSON, Kjell**; Norrtälje Patentbyrå AB, P.O.  
Box 38, S-S-761 21 Norrtälje (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **PARTICLE SEPARATOR**

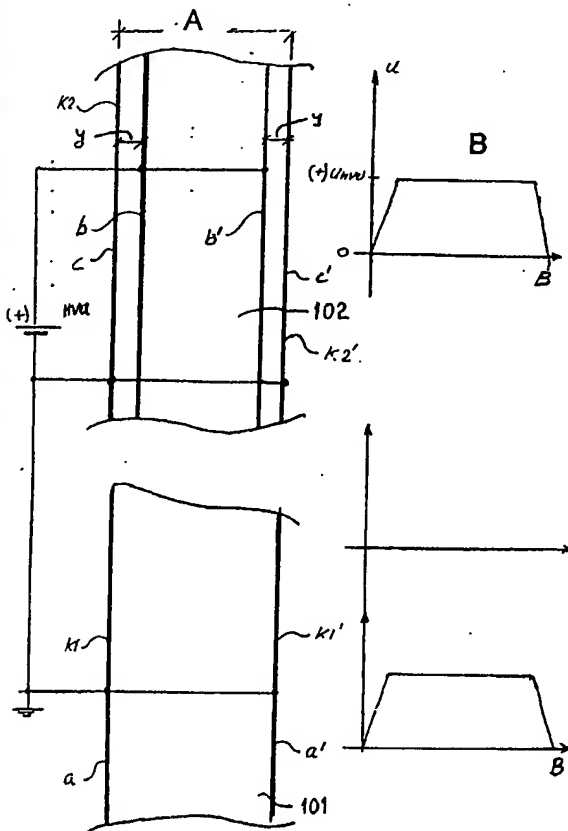

(57) Abstract: The present invention relates to a particle separator having a flow passage for the air to be cleaned, said particle separator being intended for cleaning air from electrically charged particles and comprises at least two electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) arranged substantially parallel to each other and at a mutual gap width (d), at least one electrode element surface (2; 102; 202; 302) being designed from a very high ohmic material, preferably with a resistivity corresponding to or higher than antistatic, and that the particle separator also is intended to be connected to a high voltage source (HVU), said second electrode element surface (1; 101; 201; 301) being intended to be connected to the pole of the high voltage source (HVU) having the lowest absolute potential. It is significant for the particle separator according to the present invention that the electrode element surface (2; 102; 202; 302) is made from high ohmic material and equipped with at least one current carrying or semi-conductive means (b, b') arranged at a distance from the edge portions (K1, K1', K2, K2') of the electrode element surface (2, 102; 202; 302), and that the current carrying or semi-conductive means (b, b') is intended to have a galvanic connection to the pole of the high voltage source (HVU) having the highest absolute potential.

WO 03/013734 A1

BEST AVAILABLE COPY

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

1990-1991

## PARTICLE SEPARATOR

## Technical Field of the Invention

The present invention relates to a particle separator  
5 having a flow passage for the air to be cleaned, said particle separator being intended for cleaning air from electrically charged particles and comprises at least two electrode element surfaces arranged substantially parallel to each other and at a mutual gap width, at least one electrode element surface  
10 being designed from a very high ohmic material, preferably with a resistivity corresponding to or higher than antistatic, and that the particle separator also is intended to be connected to a high voltage source, said second electrode element surface being intended to be connected to the pole of  
15 the high voltage source having the lowest absolute potential.

## Prior Art

In WO 93/16807 and SE WO 95//14534 a two step electro filter having a ionisation section is described, said electro  
20 filter on the downstream side being followed by a so called precipitator. The electrode elements of the precipitator, said elements in the mentioned patent applications constituting non-metallic material of very high resistivity (so called antistatic material), having a considerable  
25 improvement regarding separating capacity compared to precipitators of traditional design, i.e. of metallic material. These operating properties are based on the fact that electrode elements of material having antistatic resistivity may be connected to a higher mutual voltage,  
30 without the risk of a spark-over between adjacent electrode elements compared to corresponding electrode elements that are designed from material having low resistivity.

In accordance with international patent application  
35 WO 93/16807 electric connection of respective electrode element is effected by having a current carrying paint arranged on the edge portions of the electrodes, said respective electrode element being located in such a way that a current carrying edge portion of one electrode element is

positioned at a gap width from the other electrode element and alternately.

In accordance with international patent application WO 95/14534 the edge portions of the electrode elements in a precipitator are surrounded by an electrically insulating material in order to counteract corona current discharge from the edge portions and thus enable even higher voltage application of adjacent electrode elements in a precipitator of the type in question.

Working experiences of precipitators designed in accordance with the above-mentioned patent specifications have shown that said precipitators, despite the advantages mentioned above, have a relatively large difference as regards separation capacity for aerosols, due to the relative humidity of the air that passes through such precipitators.

In laboratory tests with precipitators designed from cellulose based material and located in environments with varying relative humidity it has surprisingly shown that at a high humidity the threshold value is dramatically decreased (i.e. the voltage at which corona current discharge starts) for corona current discharge between adjacent edge portions of respective electrode elements. This phenomena is probably due to that edge portions of cut cardboard constitute a lot of micro fibres that emit corona discharge like small pointed electrodes. The forceful dependency between the threshold value of the corona current discharge and the relative humidity of the air may depend from a highly varying resistivity in the fibres. This may be the case despite the fact that respective electrode elements are on one hand designed from cellulose material covered with thin plastic film in order to prevent a change in the resistivity of the material due to humidity (in accordance with the specification of WO 97/09117) and on the other hand that the electrode elements may be designed with electrically insulating structures that are provided over the edge portions of the electrode elements (in accordance with the specification of WO 95/14534) to prevent corona current discharge from these electrode elements. The last mentioned treatment is evidently not resulting in a sufficient inclusion (insulation)

especially in connection with such embodiments where the gap width between adjacent electrode elements is not much differing from the thickness of the material from which respective electrode elements are designed and it is also in practice difficult to apply an electrically insulating structure with sufficient accuracy.

#### Further Background of the Present Invention

Figure 1a shows a known embodiment of a precipitator designed from cellulose material, said precipitator including two electrode elements 1, 2 arranged with a mutual gap width "d" and arranged in planes parallel to each other. As is evident from figure 1b the electrode elements 1, 2 are electrically connected to respective poles of a high voltage source HVU through galvanic connection to an electrically semi-conducting or current carrying wire drawing a, b attached to the edge portions k1, k2 of the respective electrode elements 1, 2.

The circumstances concerning voltage-current that is valid between the electrode elements 1, 2 are shown in figure 1b. One pole of the high voltage source HVU is electrically earthed and is connected to the current carrying edge portion k1 of one electrode element 1. The other alive pole (+) is connected to the current carrying edge portion k2 of the other electrode element 2 (wire drawing b). In this case the edge portion and the wire drawing coincide. The width of the electrode elements 1, 2, seen in the air flow direction through the precipitator, is equal to "B". The voltage across the gap between the adjacent edge portions k1-k2', k1'-k2 is designated  $U_k$  and corresponds to the voltage that maintains the corona discharge current  $I_c$  from the edge portions k2, k2'.

At the top of figure 1c a voltage diagram is drawn for the electrode element 2 as a function of the width "B" of the electrode element 2. The diagram over the electrode element 2 shows that there is a linear increase in voltage from the voltage level  $U_k$ , closest to the edge portion k2', to the corresponding  $U' = HVU(+)$  at the edge portion k2, i.e. the

alive pole of the high voltage source having the highest potential.

The intermediate diagram in figure 1c shows the corresponding voltage diagram for the electrode element 1 where the voltage is equal to zero at the edge portion k1, said voltage increasing linearly to the voltage level  $U'' = HVU(+) - U_k$  at the edge portion k1'.

By positioning both diagrams in one, at the bottom of figure 1c, the gap voltage  $U_{sp}$  is given as a function of the width "B" of the electrode elements 1, 2.

For reasons of simplicity the corona current from the edge portions n'-m', m-n has been disregarded. For band like electrode elements having a length "L" that is several times the width this assumption is perfectly correct. For rectangular electrode elements the approximation is acceptable under the prerequisite that the width of the electrode elements is considerably larger than their extension in the direction of the air flow or that the edge portions n'-m', m-n are included, e.g. by use of electrically insulating material.

As figure 1c shows the gap voltage  $U_{sp}$  between two electrode elements 1, 2 of very high ohmic material is essentially constant over the entire gap and the width "B" of the electrode elements, seen in the direction of the air flow, and equal to the voltage  $U_k$  that upholds the corona discharge current  $I_c$ .

If the diagram shown in figure 1d is considered, said diagram showing approximately the corona discharge current  $I_c$  as a function of the voltage  $U_k$  between edge portions of two adjacent electrode elements, it is realised that the steeper the curve is, i.e. the larger the derivative  $(I_{c1} - I_{c2}) / (U_{k1} - U_{k2})$  is, the less the level of the gap voltage  $U_{sp}$  is affected by increasing high voltage supply HVU. In other words the gap voltage  $U_{sp}$  between two electrode elements designed of very high resistive, preferably antistatic, material (inside the voltage area above the threshold value for corona discharge between the edge portions of the electrodes) is only to a minor degree affected by increasing supply voltage (high voltage HVU) to those electrode elements.

By increasing air humidity ( $R_h$  - relative air humidity), i.e.  $R_{h1} > R_{h2}$  a displacement towards lower voltage levels of the threshold voltage of edge corona discharge takes place, this being verified in the laboratory tests (see figure 1e).  
5 Simultaneously the derivative increases ( $I_{c1}-I_{c2}/U_{k1}-U_{k2}$ ), i.e. the edge corona voltage as a function of the edge corona current increases towards a steeper progress. Thereby, a considerable decrease of the edge corona voltage  $U_k$  and hence a decrease of the gap voltage  $U_{sp}$  takes place by increasing  
10 air humidity and at a constant edge corona current ( $I_c = \text{constant}$ ). The ability of high resistive precipitators to separate particles decreases to the same extension. The understanding as outlined above constitutes the base of the present invention.

15

#### Objects and Features of the Invention

The primary object of the present invention is to present a new highly resistive (antistatic) particle separator having essentially improved operative parameters than  
20 previously known embodiments.

Still an object of the present invention is to make the particle separator less sensitive to the relative humidity of the environment that the particle separator is located in.

At least the primary object of the present invention is  
25 realised by means of a particle separator that has been given the features of the appending independent claim. Preferred embodiments of the invention are defined in the dependent claims.

#### 30 Brief Description of the Drawings

Relevant prior art has been described above with reference to figures 1a-1e, where:

Figure 1a shows a schematic perspective view of two electrode elements of a precipitator;

35 Figure 1b shows the electrode elements according to figure 1a spread in the plane of the paper;

Figure 1c shows three diagrams that relate to the variation of the voltage across the width of an electrode element;

- Figure 1d shows the corona discharge current  $I_c$  as a function of the voltage  $U_k$ ; and
- Figure 1e shows the corona discharge current  $I_c$  as a function of the voltage  $U_k$  at varying relative humidity.
- 5 The present invention will be described more in detail in connection with the enclosed figures 2a-5b, where:
- Figure 2a schematically shows a perspective view of a first embodiment of a particle separator;
- Figure 2b shows the electrode elements according to figure 2a spread in the plane of the paper and illustrate the relation voltage - current between two adjacent electrode elements 1, 2 in the embodiment of Fig 2a;
- 10 Figure 2c shows three diagrams that relate to how the voltage varies across the width of an electrode element;
- 15 Figure 3a shows a second embodiment of a particle separator according to the present invention;
- Figure 3b shows a number of voltage diagrams that relates to the embodiment according to figure 3a;
- Figure 4a shows a further embodiment of a particle separator according to the present invention;
- 20 Figure 4b shows a number of voltage diagrams that are related to the embodiment according to figure 4a;
- Figure 5a shows a particle separator according to the present invention of "honeycomb" type; and
- 25 Figure 5b shows an arrangement of wire drawing for the particle separator according to figure 5a.

#### Detailed Description of Preferred Embodiments

Figure 2a shows two highly resistive, from cellulose material designed, electrode element surfaces 1 and 2 arranged parallel to each other and at a mutual gap width "d". The electrode elements surfaces 1, 2 are planar and the air flow takes place in the gap between the electrode element surfaces 1, 2. Two thin lines in the shape of wire drawings a, a' and b, b' respectively of semi-conductive paint are provided by means of print, paint or corresponding treatment, the wire drawings a, a' being related to the electrode element surface 1 while the wire drawings b, b' are related to the electrode element surface 2. The wire drawing a is related to the edge



portion k1 of the electrode elements surface 1 while the wire drawing a' is related to the edge portion k1' of the electrode element surface 1. In an analogue way the wire drawing b is related to the edge portion k2 of the electrode element surface 2 while the wire drawing b' is related to the edge portion k2' of the electrode elements surface 2. The wire drawings a, a' and b, b' respectively run parallel to each other and a certain distance from the edge portion k1, k1' and k2, k2' of respective electrode elements 1, 2. The wire drawings a, a' are connected to an electrically earthed pole of a high voltage source HVU and the wire drawings b, b' are connected to the other pole (+) of the high voltage source HVU.

In order to avoid spark-over between the wire drawings a, a', b, b' it is important that the wire drawings a, a' are not located opposite to the wire drawings b, b'. Thus the distance "l" in figure 2a should be at least equal to or larger than the double gap width "d".

Figure 2b shows the corresponding observation of the voltage conditions in the gap "d" between two adjacent electrode element surfaces 1, 2 corresponding to the observation shown in figure 1b. In figure 2c a voltage diagram is shown for respective electrode element surfaces 1, 2 as a function of the width "B" of respective electrode elements 1, 2. The voltage diagram at the top in Fig 2c for the electrode element surface 2 shows a linear increase in voltage from the voltage level  $U_k$  at the edge portion k2 of the electrode element surfaces to the voltage  $U = HVU (+)$  at the level of the wire drawing string b. Within the area B-2y the voltage is constant and equal to  $UHV (+)$ . From the right end of the area B-2y in the voltage diagram the voltage decreases linearly to a value equal to  $U_k (+)$  at the edge portion k2' of the electrodes element surface.

The intermediate voltage diagram in figure 2c shows the corresponding voltage diagrams for the electrode element surface 1, said voltage being equal to zero in the area B-2y' and increasing voltage towards the edge portions k1, k1' on the electrode element surface 1, said voltage level corresponding to  $U_k (-)$ . By placing both diagrams in a common

diagram, at the bottom in figure 2c; the gap voltage  $U_{sp}$  is given as function of "B", see figure 2c.

The wire drawings a, a', b, b' are preferably arranged in such a way that adjacent wire drawing strings on adjacent electrode elements 1, 2, e.g. a' and b', are arranged to be located at a larger distance from each other than twice the gap width "d" in order to avoid the spark-over risk between wire drawing strings that are connected to different poles of the high voltage source HVU.

As is shown by the diagram at the bottom of figure 2c the gap voltage  $U_{sp}$ , in the portions of the gap that simultaneously is within area B-2y and B-2y', is equal to the voltage of the high voltage source HVU and fairly independent of the conditions regarding corona discharge from the edge portions k1, k1', k2, k2' of the electrode element surfaces 1, 2.

The design of the electrode element surfaces 1, 2 in accordance with the embodiment shown in figure 2 is however not preventing corona discharge (edge corona current  $I_c$ ) between adjacent edge portions k1, k1', k2, k2' of the electrode elements 1, 2. Such a discharge produces on one hand unwanted generation of ozone and influence on the other hand particle shaped pollutions that are charged in the ionisation chamber, when said particles, together with the air flow, bypass the edge portions of the electrode elements 1, 2 and in through the particle separator. Under influence of the edge corona current  $I_c$  some of these particles loose their charge and may then freely pass the particle separator.

In accordance with the present invention it is possible to totally eliminate corona discharge current  $I_c$  between edge portions of adjacent electrode elements 1, 2 and also to control the gap voltage  $U_{sp}$  in a desired way by suitably arranged wire drawing strings.

Figure 3a shows an embodiment that constitutes a further development of the present invention. In the embodiment shown in figure 3a the wire drawing strings a, a' are arranged on, or in the absolute adjacency of, the edge portions k1, k1' of the electrode element surface 101 and wire drawing strings c, c' on the edge portions k2, k2' of the electrode element

surface 102. Further, two wire drawing strings b, b' are arranged on the electrode element surface 102, said wire drawing strings running parallel to the edge portions k2, k2' and at a distance "y" from the edge portions k2, k2'. In accordance with the embodiment shown in figure 3a the wire drawing strings a, a', b, b' arranged on the edge portions k1, k1', k2, k2' are connected to the same pole of the high voltage source HVU and preferably earthed. The wire drawing strings b, b' are connected to the other pole of the high voltage source HVU(+). Figure 3b shows voltage diagrams corresponding to the diagrams previously shown in figure 2b. The voltage diagram at the top of figure 3b shows the voltage over the electrode element surface 102, said gap voltage Usp according to the diagram being equal to zero at the edge portion k2 and then it increases linearly to the supply level HVU(+) of the high voltage source on the wire drawing string b. Between the wire drawing strings b, b' the voltage is constant and equal to the supply voltage from the high voltage source UHVU(+). From the wire drawing string b' the voltage decreases linearly down to zero at the edge portion k2'. The intermediate voltage diagram in figure 3b shows the voltage over the electrode element surface 101, said voltage constantly being equal to zero since both edge portions k1 and k1' of the electrode element surface 101 are connected to earth of the high voltage source UHVU(+). The diagram at the bottom of figure 3b shows an addition of the diagrams of the electrode element surfaces 101 and 102, said diagram being identical to the diagram at the top since the intermediate diagram has no influence. Thus, the voltage is zero at the inlet of the particle separator, said voltage increasing linearly to the supply voltage level UHVU(+) and then decreases linearly to zero at the outlet from the particle separator. Of course, it is not necessary to electrically connect all wire drawings a, a', b, b' to the same voltage pole of the high voltage source HVU. In practical embodiments it may however be an advantage.

In figure 4a further embodiment of the present invention is shown. The lower electrode element surface 201 in figure 4a corresponds in principle to the electrode element surface

101 in figure 3a, i.e. the edge portions k1, k1' are equipped with wire drawings a, a' that preferably are connected to earth of a high voltage source (not shown). The upper electrode element surface 202 in figure 4a is equipped with a number of wire drawings b, c, e, f, g, h that are arranged along the width B of the electrode element surface 202. As is evident from the upper voltage diagram in figure 4b, said diagram referring to the electrode element surface 202, the wire drawings are connected to different potential of the high voltage source. The reason therefore is to achieve an increasing voltage the more far in between the electrode element surfaces that the charged particles in the air reach. It has been assumed that the air flow is directed to the right in figure 4a. At the right edge portion k2' of the electrode element surface 202 the voltage is substantially zero in order to avoid corona discharge from the edge portion k2'. The intermediate voltage diagram in figure 4b represents the electrode element surface 201 and the in the voltage diagram at the bottom of figure 4b the both above positioned diagrams have the added.

As is shown in figure 5a a so-called "honeycomb"-structure of preferably cellulose-based material is provided. Such a structure usually consists of several pleated paper strips that for instance are joined by a suitable adhesion in such a way that air flow channels "Lk" are created.

In the embodiment shown in figure 5b the particle separator of honeycomb type thus comprises a number of air flow channels "Lk", in which two opposite parallel electrode element surfaces 301 and 302 are incorporated. The electrode element surface 301 is rectangular or square and provided on a pleated carrier, said surface being equipped with wire drawing strings a, a' on the edge portions k1, k1' of the electrode element surfaces 301. The electrode element surface 302 is likewise the electrode element surface 301 pleated from a rectangular or a square surface and is on one hand provided with wire drawing strings c, c' on the edge portions k2, k2' of the electrode element surfaces 302 and on the other hand provided with wire drawing strings b, b' that are arranged at

a distance "y" from the edge portions k2, k2' of the electrode element surfaces 302.

As is shown in figure 5b the particle separator of the honeycomb type according to the present invention is created from a number of pleated strips that assembled define several pairs of electrode element surfaces 301 and 302 respectively, said strips being arranged in the following turns: The electrode element surface 302 is followed by three electrode element surfaces 301 and then again an electrode element surface 302, whereupon follows three electrode element surfaces 301 and so on.

In accordance with the embodiment described in figure 5b the edge portions k1, k1', k2, k2', i.e. the wire drawing strings a, a', c, c', are connected to an earthed pole of the high voltage source HVU. The wire drawing strings b, b' are connected to the other pole of the high voltage source HVU.

A particle separator of "honeycomb"-type may be folded and is easy to design mechanically stable. The advantage of this embodiment is also the possibility to design large rectangular surfaces that are permeable to air flow.

It is easy to realise that by choosing the number of wire drawing strings, their location and the voltage application of these wire drawing strings high resistive particle separators according to the present invention may be custom made for desired operation conditions.

Indeed the particle separator according to the present invention brings about a certain load on the high voltage source due to the resistive current that is fed through the very high-resistive material of the electrode element surfaces 1, 2; 101, 102; 201, 202; 301, 302 in the area of the edge portions of the electrode element surfaces 1, 2; 101, 102; 201, 202; 301, 302. For this reason the expression "particle separator" has been used in the present patent application since the device does not constitute a precipitator in traditional meaning. By the use of very high ohmic, preferably antistatic, material as for instance cellulose based material it is still a question of negligible required power, especially when particle separators are designed with

very small gap width "d" between respective electrode element surfaces 1, 2; 101, 102; 201, 202; 301, 302.

The present invention is not restricted to any special embodiments of wire drawing strings a, a', b, b', c, c', e, e', f, f'. The most important is that through these strings or current carrying or semi-conductive means that are arranged on the electrode element surface 1, 2; 101, 102; 201, 202; 301, 302 it is achieved that preferably a substantial portion or substantial portions of a respective electrode element surface 1, 2; 101, 102; 201, 202; 301, 302 may be energised in a controlled way as well as a defined potential of the edge portions k1, k1', k2, k2' of the electrode element surface.

It is a common feature for all the above described embodiments that the distance "y" between the current carrying or semi-conductive means and the edge portions k1, k1', k2, k2' of the electrode element surfaces 1, 2; 101, 102; 201, 202; 301, 302 is at least equal to twice the gap width "d".

It may be an advantage that several wire drawing strings and/or wire drawing patterns are arranged on one and the same electrode element surface 1, 2; 101, 102; 201, 202; 301, 302. In certain cases it may be an advantage that these wire drawing strings and/or wire drawing patterns may be connected to separate poles of the high voltage source or to separate high voltage sources. In such a case it might be an advantage that the wire drawing string that is furthest away from the edge portion k1, k1', k2, k2' of respective electrode element surfaces is connected to a higher voltage than other wire drawing string that is closer to the edge portion k1, k1', k2, k2' of the electrode element surfaces.

A forced energising over portions of the gap "d" is a prerequisite for constant separating ability of high-resistive (antistatic) particle separators.

It is thus of no importance how the charging is effected of aerosols in the air that is transported through the device or which voltage polarity the high voltage source HVU has. It is neither of any importance how the air transport through the device is taken care of. The transport may be effected by means of mechanical fans, electric wind fans, draught or in other known ways. Preferably, cellulose based material may be

used for the electrode element surfaces of the particle separator. Wire drawing strings (pattern) are suitably attached to the material and then the material is preferably coated with a thin damp-proof membrane of a plastic, e.g. polyethylene. Such treatment of a paper is known and is used for instance in connection with food packages.

The present invention may preferably be used to design particle separators of planar, parallel electrode element surfaces that are arranged at a mutual gap width of "d" or particle separators of band-like electrode element surfaces several times wound round an axis at a gap width "d" in accordance with the specification of the international patent application WO 97/46322. It is also possible to design quite different shapes of particle separators in accordance with figures 5a and 5b.

It should be pointed out that the particle separator according to the present invention does not comprise a high voltage source HVU since it in practice very well may be that the user already has a high voltage source (HVU), to which the particle separator could be connected.

#### Feasible Modifications of the Invention

In connection with the embodiments described above all electrode element surfaces have a high resistivity. However, within the scope of the present invention it is also feasible that one electrode element surface is metallic and in such a case it is suitable to connect this surface to earth.

In the embodiments described above the electrode element surfaces have two current carrying or semi-conductive means that are arranged at a certain distance from the edge portions of the electrode element surfaces. However, within the scope of the present invention it is also feasible that one electrode element surface has only one current carrying or semi-conductive means that in such a case preferably is arranged at the same distance from the edge portions of the electrode element surfaces.

In connection with the embodiments described above according to figures 2a and 3a the positive pole of the high voltage source HVU has the highest potential. However, this

potential may on the contrary be negative while the other pole for instance is earthed. For this reason the expression "absolute potential" has been used in the claims.



## Claims

1. Particle separator having a flow passage for the air to be cleaned, said particle separator being intended for cleaning  
5 air from electrically charged particles and comprises at least two electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) arranged substantially parallel to each other and at a mutual gap width (d), at least one electrode element surface (2; 102; 202; 302) being designed from a very high ohmic  
10 material, preferably with a resistivity corresponding to or higher than antistatic, and that the particle separator also is intended to be connected to a high voltage source (HVU), said second electrode element surface (1; 101; 201; 301) being intended to be connected to the pole of the high voltage  
15 source (HVU) having the lowest absolute potential, characterized in that the electrode element surface (2; 102; 202; 302) made from high ohmic material is equipped with at least one current carrying or semi-conductive means (b, b') arranged at a distance from the edge portions  
20 (k1, k1', k2, k2') of the electrode element surface (2, 102; 202; 302), and that the current carrying or semi-conductive means (b, b') is intended to have a galvanic connection to the pole of the high voltage source (HVU) having the highest absolute potential.
- 25
2. Particle separator according to claim 1, characterized in that both of the electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) are designed from a very high ohmic material, preferably with a  
30 resistivity corresponding to or higher than antistatic, that both electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) each are equipped with at least one current carrying or semi-conductive means (a, a', b, b') arranged at a distance from the edge portions (k1, k1', k2, k2') of the electrode  
35 element surfaces (1, 2; 101, 102; 201, 202; 301, 302).
3. Particle separator according to claim 1, characterized in that both electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) are designed

From a very high ohmic material, preferably with a resistivity corresponding to or higher than antistatic, that the edge portions (k1, k1', k2, k2') of both electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) each are equipped with  
5 current carrying or semi-conductive means (a, a', c, c') that are intended to be connected to the lowest absolute potential of the high voltage source (HVU), and that one electrode element surface (2; 102; 202; 302) is equipped with at least  
10 one further current carrying or semi-conductive means (b, b') arranged at a distance from the edge portions (k1, k1', k2, k2') of the electrode element surface (2; 102; 202; 302), and that the current carrying or semi-conductive means (b, b') is arranged to have a galvanic connection to the pole of the high voltage source (HVU) having the highest potential.

15

4. Particle separator according to any of the previous claims, characterized in that current carrying or semi-conductive means (a, a', b, b', c, c', e, e',.....) are attached to the electrode element surfaces (1, 2; 101, 102;  
20 201, 202; 301, 302) by means of print, paint, etching or the like.

5. Particle separator according to any of the previous claims, characterized in that the current  
25 carrying or semi-conductive means for each electrode element surface (1, 2; 101, 102; 201, 202; 301, 302) constitutes at least two strings (a, a', b, b', c, c', e, e',.....) that are essentially parallel to each other and to the edge portions (k1, k1', k2, k2').





30

6. Particle separator according to any of the previous claims, characterized in that the surface that is covered by the current carrying or semi-conductive means (a, a', b, b', c, c', e, e',.....) constitutes a fraction of the  
35 respective electrode element surface (1, 2; 101, 102; 201, 202; 301, 302).

7. Particle separator according to any of the previous claims, characterized in that the current  
40 carrying or semi-conductive means (a, a', b, b', c, c', e,

e',.....) have an extension perpendicular to the air flow direction through the particle separator.

8. Particle separator according to any of the previous  
5 claims, characterized in that the electrode elements are provided on bands several times wound around an imaginary axis.
9. Particle separator according to any of the previous  
10 claims, characterized in that the electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) are designed from cellulose material.
10. Particle separator according to any of the previous  
15 claims, characterized in that the electrode element surfaces (1, 2; 101, 102; 201, 202; 301, 302) are coated with a thin damp proof layer.

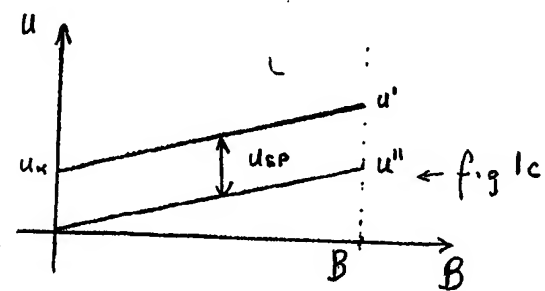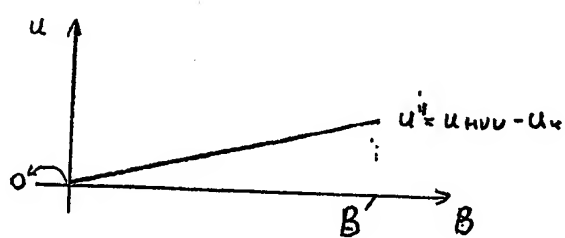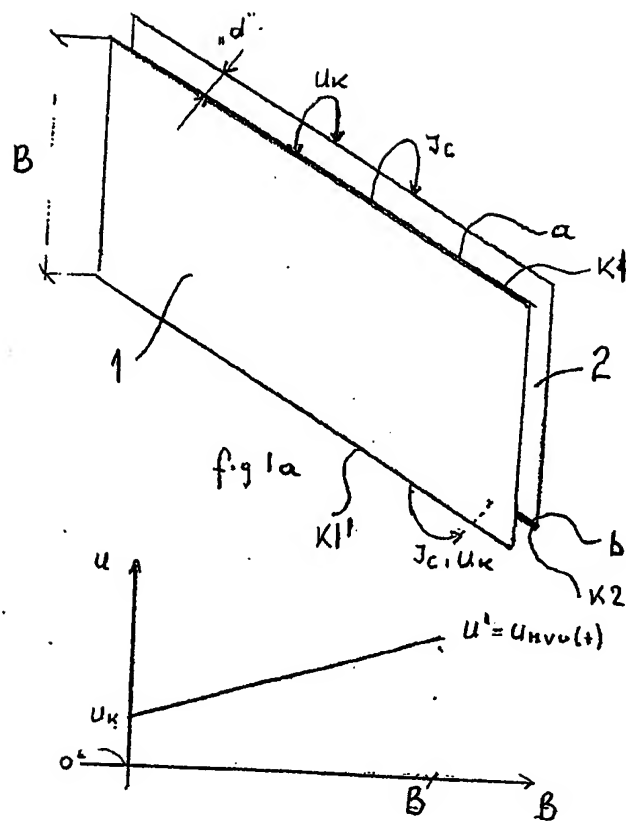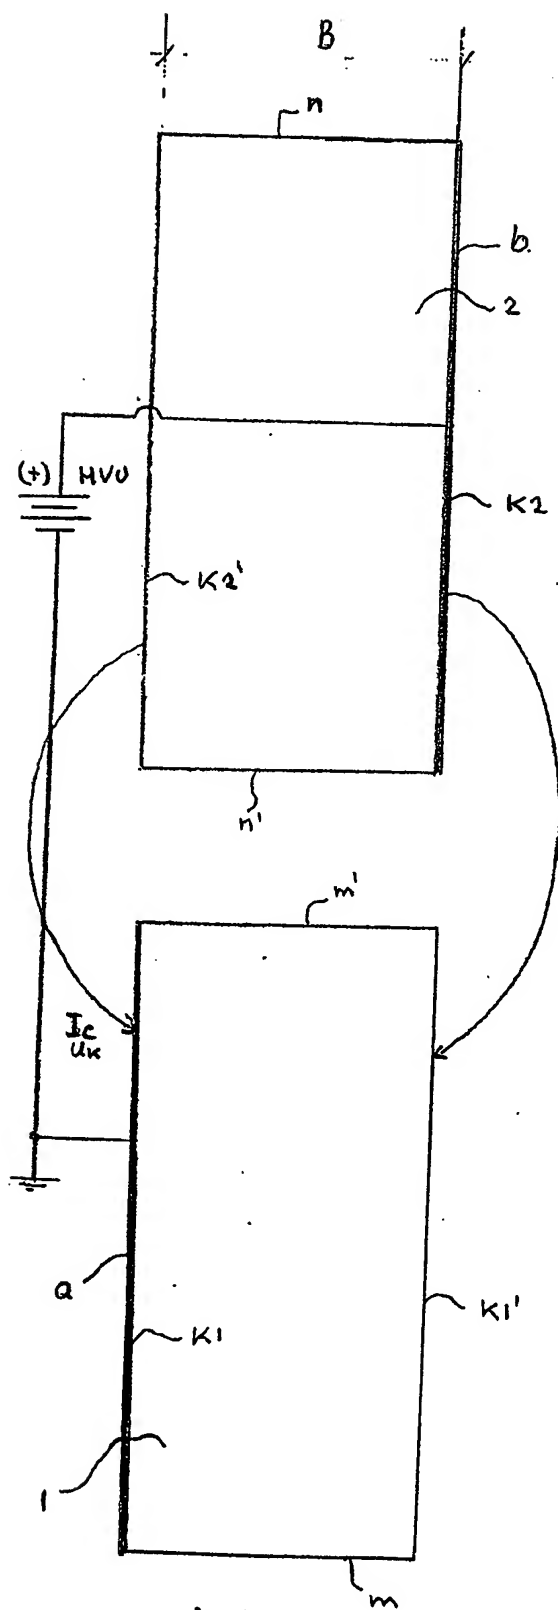

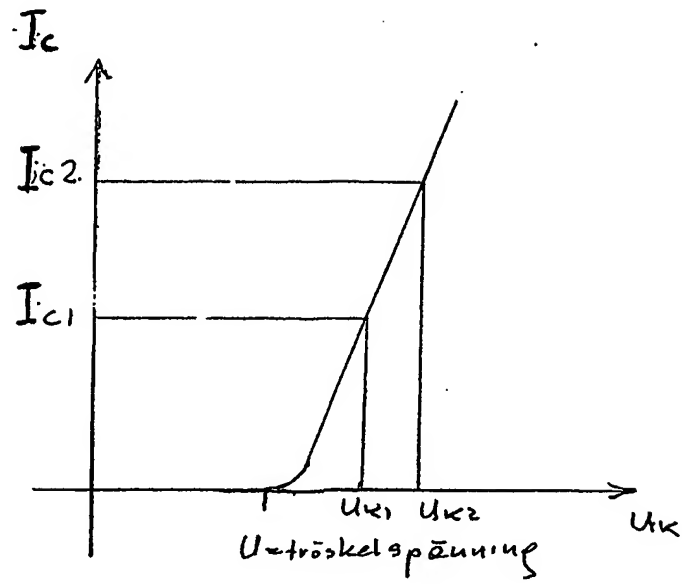


fig 1d

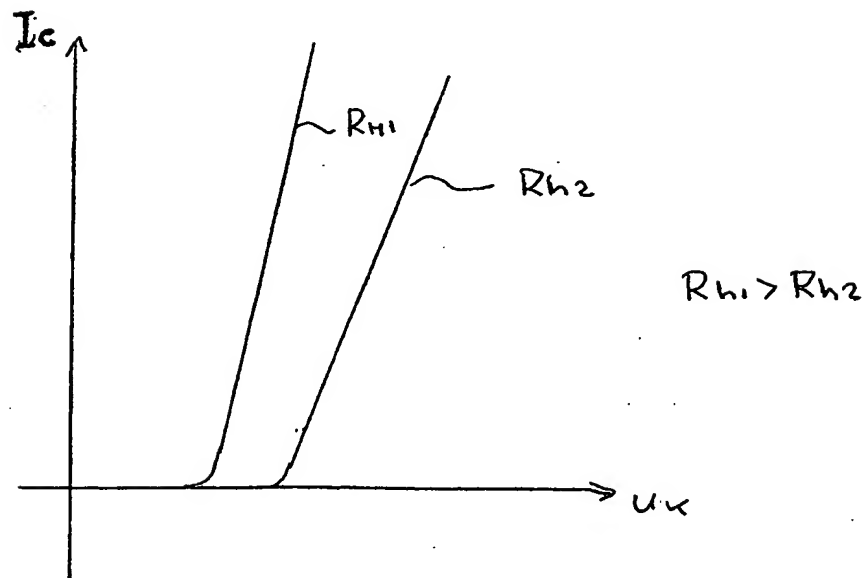


fig 1e

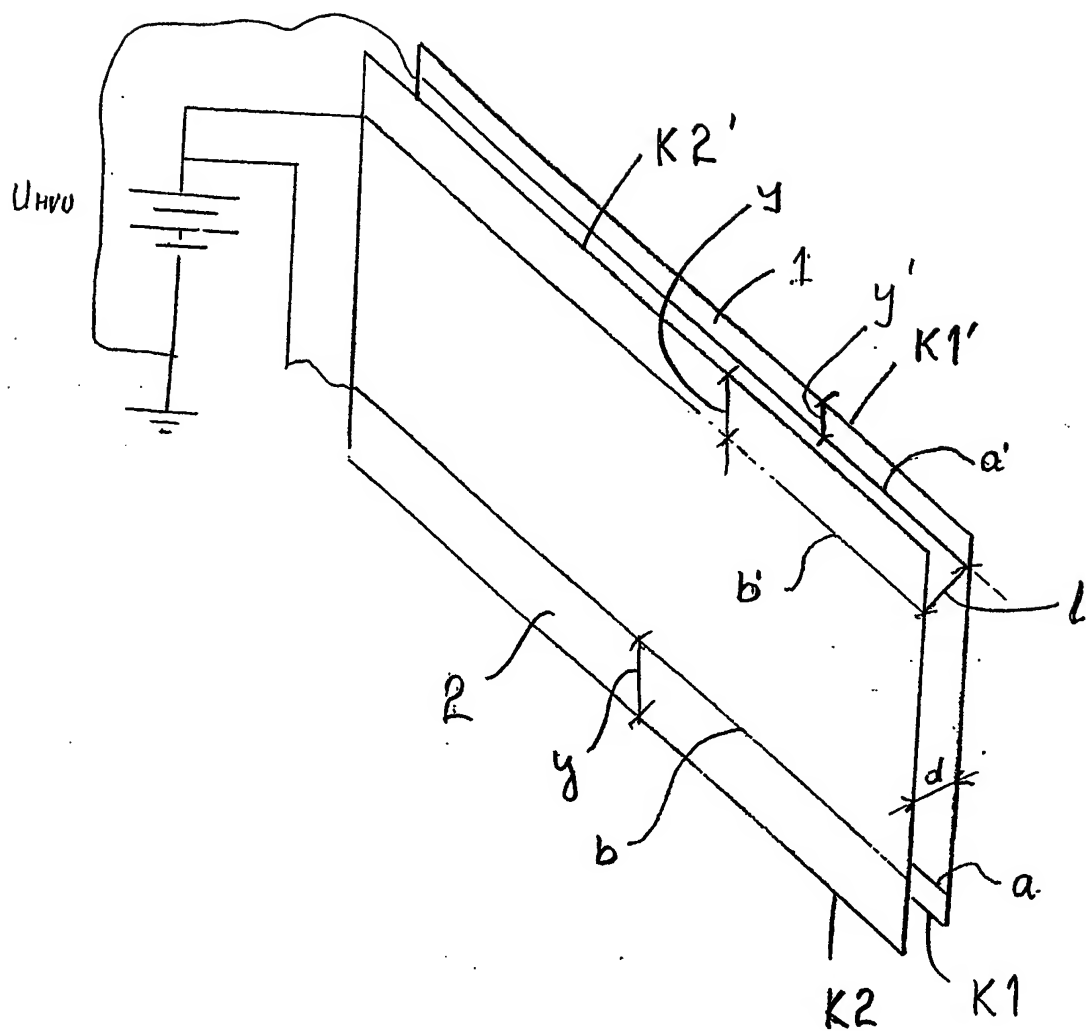


Fig. 2a

Fig 2b

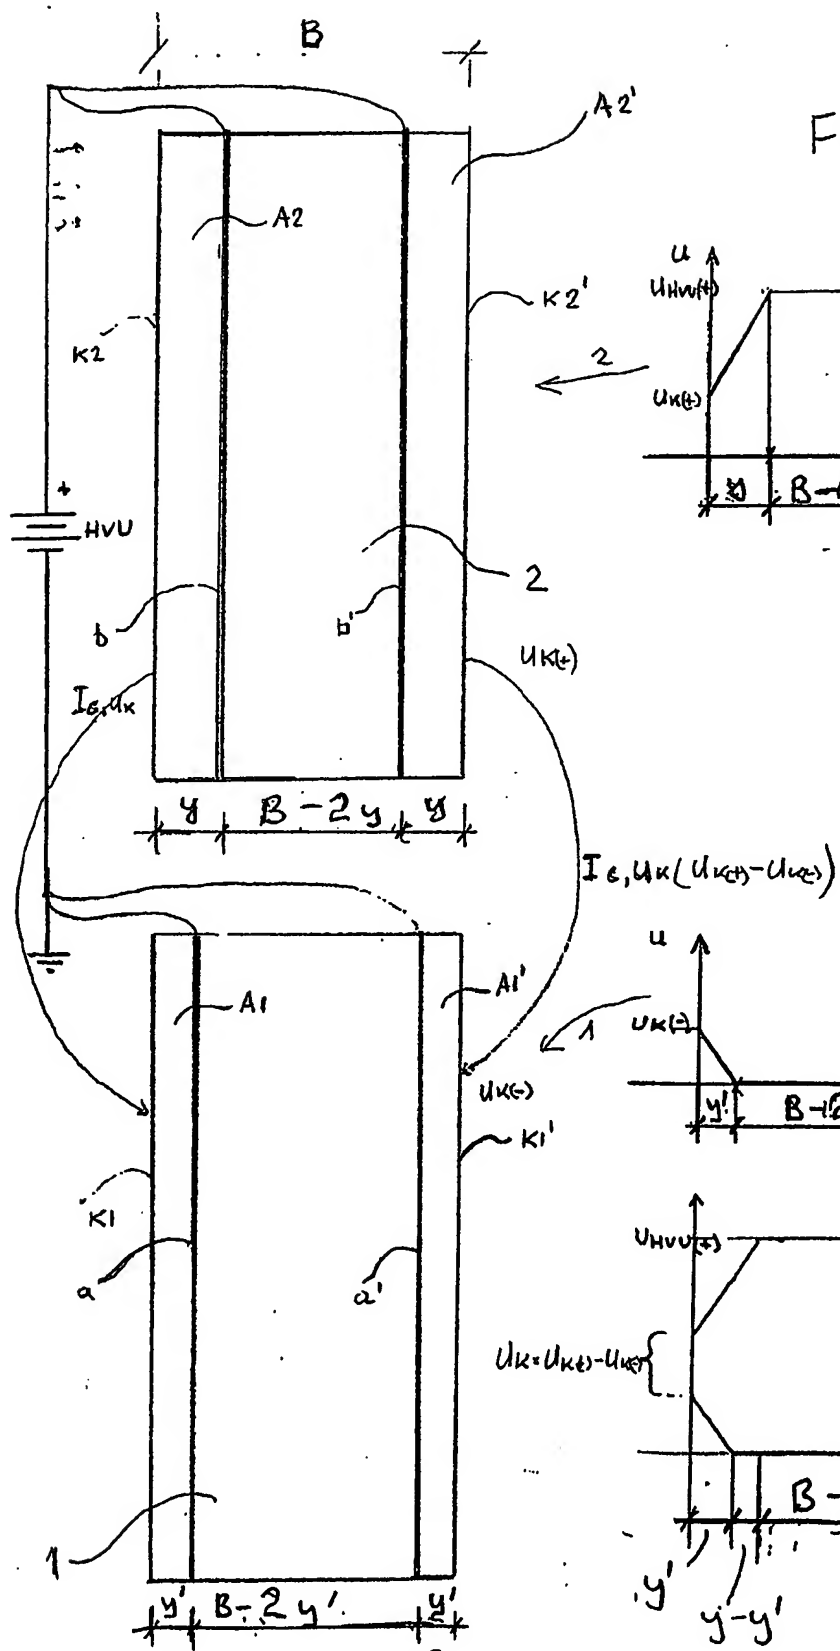
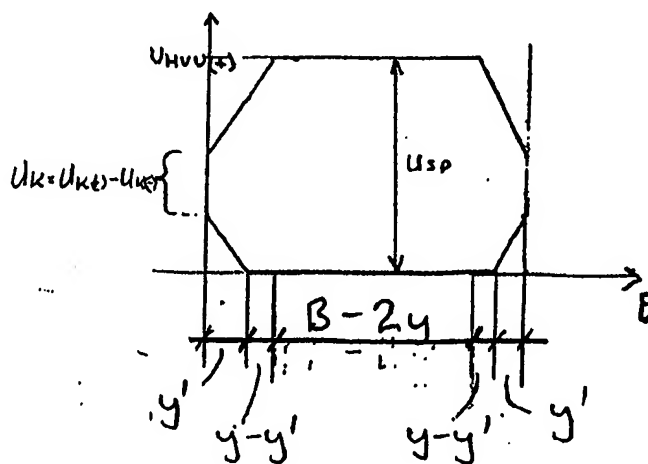
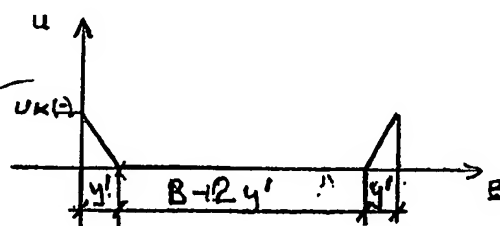

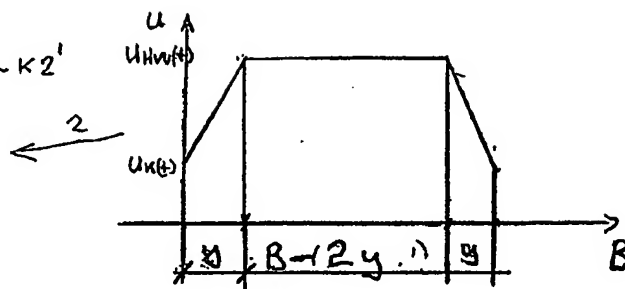


Fig 2c



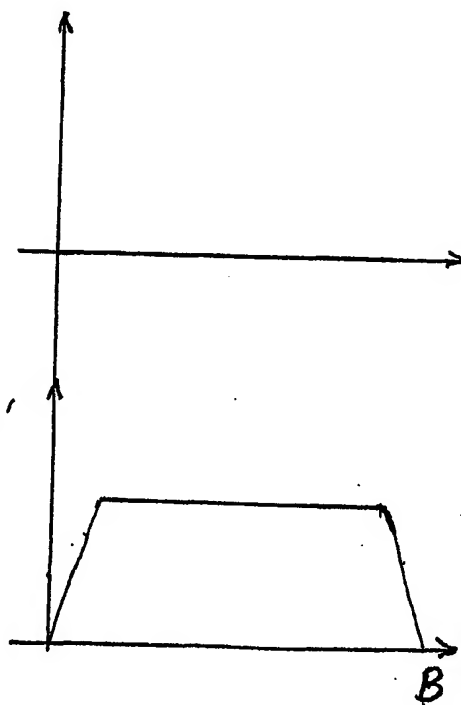
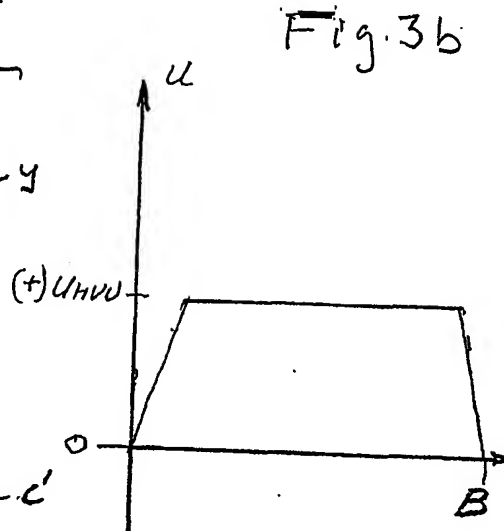
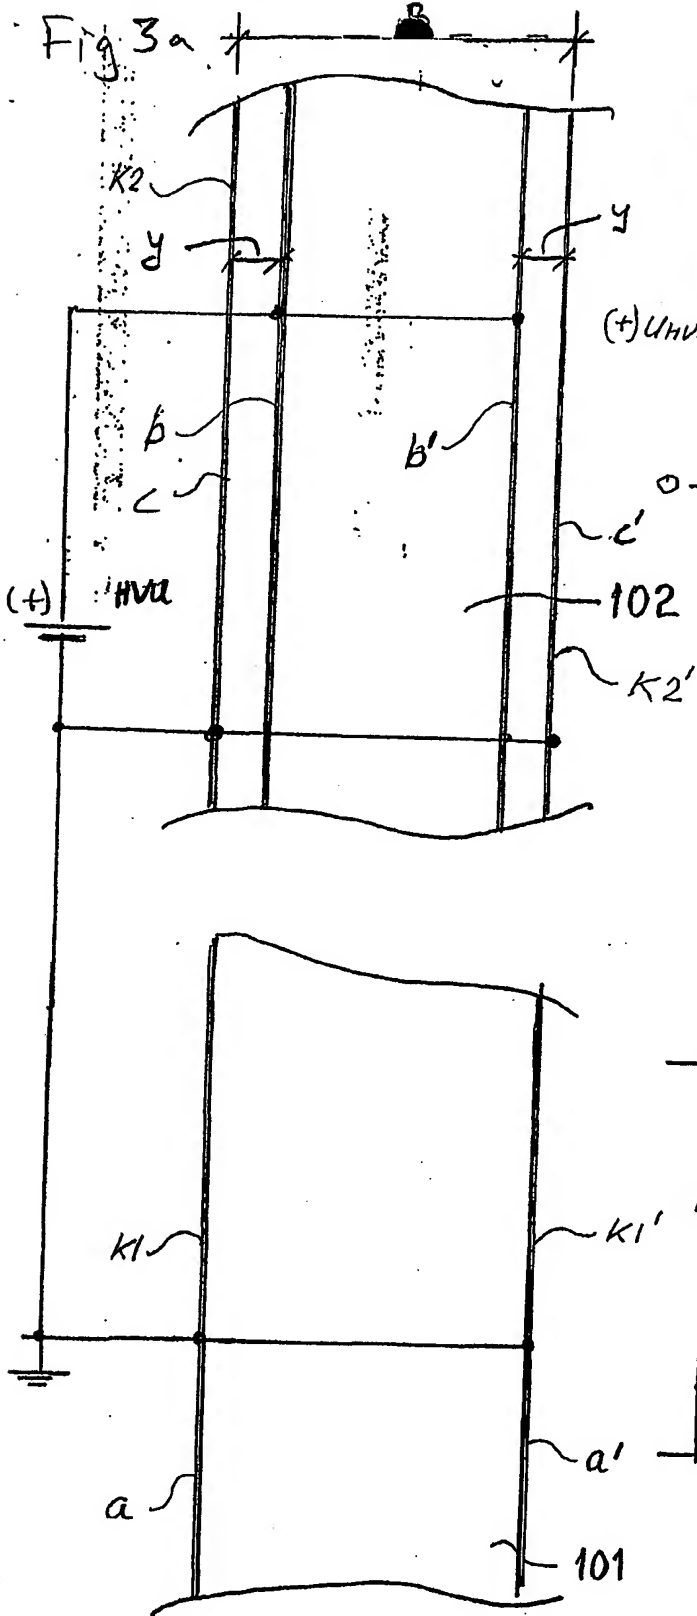




Fig 4a

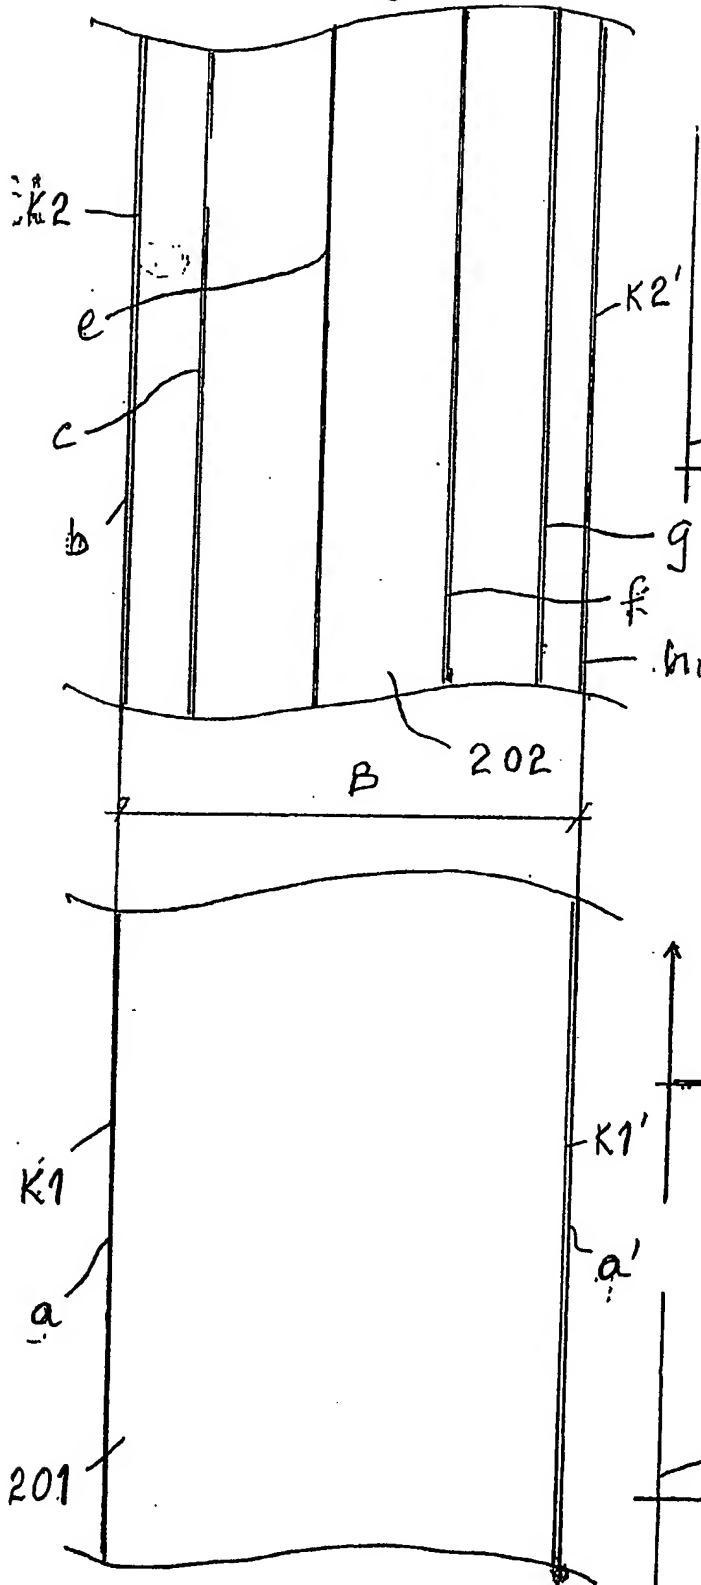
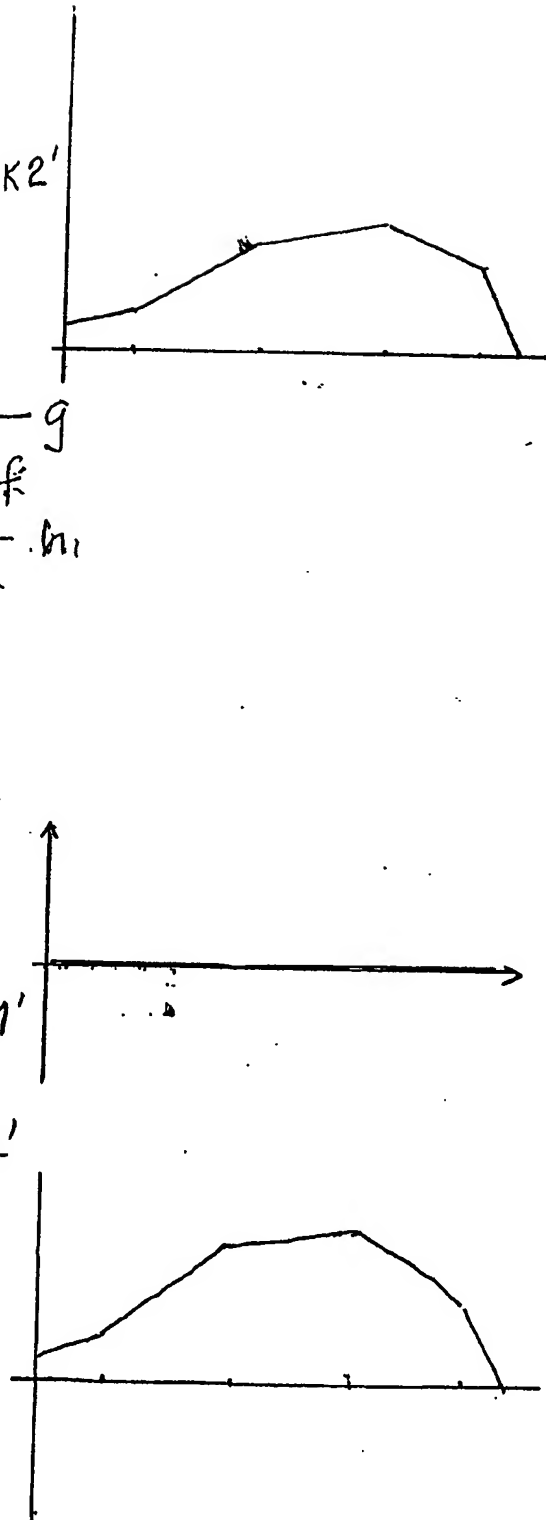


Fig 4b



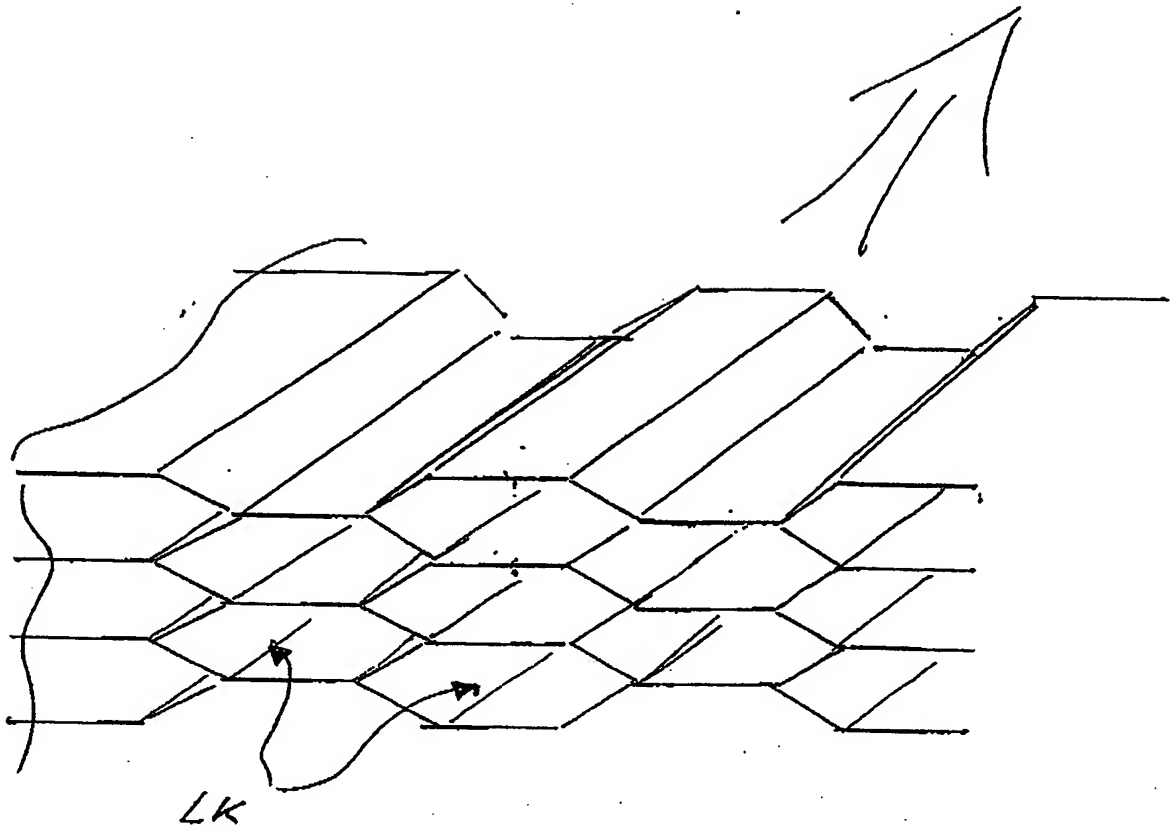


fig 5a

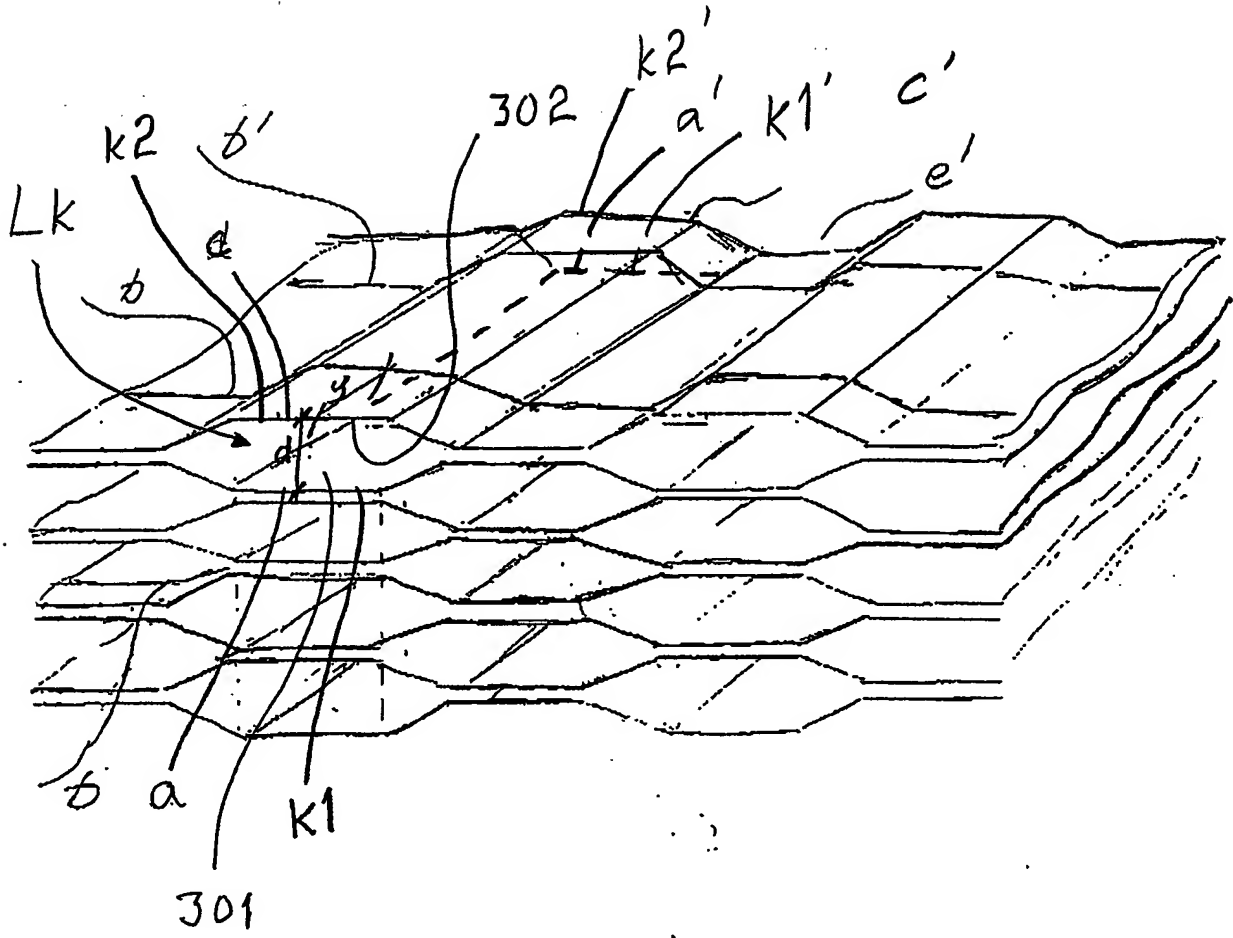


fig 5b

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01439

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B03C 3/45

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| A         | WO 9514534 A1 (TL-VENT AB), 1 June 1995 (01.06.95),<br>abstract<br>--              | 1-10                  |
| A         | US 4354861 A (CHARLES G. KALT), 19 October 1982<br>(19.10.82), abstract<br>--      | 1-10                  |
| A         | WO 9316807 A1 (TL-VENT AB), 2 Sept 1993 (02.09.93),<br>abstract<br>--<br>-----     | 1-10                  |

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

19 November 2002

Date of mailing of the international search report

21-11-2002

Name and mailing address of the ISA/  
 Swedish Patent Office  
 Box 5055, S-102 42 STOCKHOLM  
 Facsimile No. +46 8 666 02 86

Authorized officer

Ulf Nyström/ELY  
 Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members


28/10/02

International application No.

PCT/SE 02/01439

| Patent document<br>cited in search report |         |    | Publication<br>date | Patant family<br>member(s) |              | Publication<br>date |
|---|---------|----|---------------------|----------------------------|--------------|---------------------|
| WO  | 9514534 | A1 | 01/06/95            | DE                         | 69427036 D,T | 20/09/01            |
|   |         |    |                     | DK                         | 730497 T     | 25/06/01            |
|   |         |    |                     | EP                         | 0730497 A,B  | 11/09/96            |
|   |         |    |                     | ES                         | 2158070 T    | 01/09/01            |
|   |         |    |                     | JP                         | 9505522 T    | 03/06/97            |
|   |         |    |                     | SE                         | 504098 C     | 11/11/96            |
|   |         |    |                     | SE                         | 9303894 A    | 25/05/95            |
|   |         |    |                     | US                         | 5766318 A    | 16/06/98            |
| -----                                     |         |    |                     |                            |              |                     |
| US  | 4354861 | A  | 19/10/82            | US                         | 4477268 A    | 16/10/84            |
| -----                                     |         |    |                     |                            |              |                     |
| WO  | 9316807 | A1 | 02/09/93            | AT                         | 151667 T     | 15/05/97            |
|   |         |    |                     | AU                         | 658660 B     | 27/04/95            |
|   |         |    |                     | AU                         | 3581493 A    | 13/09/93            |
|   |         |    |                     | BR                         | 9206270 A    | 10/10/95            |
|   |         |    |                     | DE                         | 69309908 D,T | 20/11/97            |
|   |         |    |                     | EP                         | 0593638 A    | 27/04/94            |
|   |         |    |                     | EP                         | 0626886 A,B  | 07/12/94            |
|   |         |    |                     | SE                         | 0626886 T3   |                     |
|   |         |    |                     | FI                         | 103767 B     | 00/00/00            |
|   |         |    |                     | FI                         | 940146 A     | 12/01/94            |
|   |         |    |                     | FI                         | 943861 A     | 22/08/94            |
|   |         |    |                     | JP                         | 6511290 T    | 15/12/94            |
|   |         |    |                     | JP                         | 7503897 T    | 27/04/95            |
|   |         |    |                     | KR                         | 259675 B     | 15/06/00            |
|   |         |    |                     | NO                         | 940150 A     | 14/01/94            |
|   |         |    |                     | PL                         | 170661 B     | 31/01/97            |
|   |         |    |                     | SE                         | 469466 B     | 12/07/93            |
|   |         |    |                     | SE                         | 9200515 A    | 12/07/93            |
|   |         |    |                     | US                         | 5993521 A    | 30/11/99            |

**THIS PAGE BLANK (USPTO)**

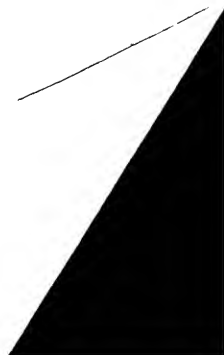

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**